

Upper Bounds on the Capacities of Non-Controllable Finite-State Channels with/without Feedback

Xiujie Huang, *Student Member, IEEE*, Aleksandar Kavčić, *Senior Member, IEEE*,

Xiao Ma, *Member, IEEE*,

Abstract

Non-controllable finite-state channels (FSCs) are finite-state channels in which the user cannot control the channel state, i.e., the state evolves freely in time. Thus far, good upper bounds on the capacities as well as computable capacities of general non-controllable FSCs with/without feedback are unknown. Here we consider the delayed channel state as part of the channel input and then mathematically define the directed information from the new channel input (including the source and the delayed channel state) sequence to the channel output sequence. With this technique, upper bounds on the capacities of non-controllable FSCs with/without feedback are developed. The upper bounds are achieved by conditional Markov sources, conditioned on the delayed feedback and the delayed state information. A dynamic programming method is proposed to optimize conditional Markov sources and the bounds are numerically computed by Monte Carlo techniques.

Index Terms

Conditional Markov source, delayed feedback, delayed state information, directed information, dynamic programming, feedback capacity, feedforward capacity, non-controllable finite-state machine channel, upper bound.

I. INTRODUCTION

The capacity of a memoryless channel without feedback was derived by Shannon in [1]. Furthermore, feedback doesn't increase the capacities of memoryless channels [2]. In contrast, there is no universal statement for the capacities of channels with memory used with/without feedback. Finite-state channels (FSCs) describe channels with finite memory such as finite-length intersymbol interference (ISI) channels [3] and Gilbert-Elliott (GE) channels [4].

Manuscript received....This work was supported by International Program of Project 985, Sun Yat-sen University, and by NSF of China and Guangdong Province (No. U0635003). This work was also supported by the NSF, grant CCF05-15154. This work was performed while X. Huang was visiting Electrical Engineering Department, University of Hawaii.

X. Huang and X. Ma are with the Department of Electronic and Communication Engineering, Sun Yat-sen University, Guangzhou 510006, Guangdong, China (email: huangxj5@mail2.sysu.edu.cn, maxiao@mail.sysu.edu.cn).

A. Kavčić is with the Department of Electrical Engineering, University of Hawaii, Honolulu 96822, Hawaii, USA.

In [3], Hirt used a Monte Carlo method to evaluate bounds on the i.u.d. capacity $C_{i.u.d.}$ of the ISI channel, which is defined as the information rate when the channel inputs are independent and uniformly distributed (i.u.d.). In recent years, [5–8] presented efficient Monte Carlo methods to evaluate $C_{i.u.d.}$ and information rates of FSCs whose inputs are Markov random processes. A generalization of the well-known Blahut-Arimoto algorithm [9, 10] was proposed to numerically optimize (maximize) information rates for a given Markov process order. These methods, coupled with recent proofs [11, 12] that Markov processes asymptotically achieve feedforward capacities of FSCs, can be utilized to very closely lower-bound the feedforward capacities. Vontobel and Arnold introduced an upper bound on the feedforward capacity [13], which is not always numerically tight. So far, the delayed feedback capacity [14] is the numerically tightest upper bound on the feedforward capacity of the *controllable* FSC, in which the user can take the channel from any state into any desired state by selecting finite channel inputs.

In 1990, Massey introduced the directed information [15], and showed that the directed information from the channel input sequence to the channel output sequence equals the mutual information between the input and output sequences if the channel is used without feedback. Massey also showed that the supremum of the directed information rate is an upper bound on the capacity if feedback is utilized. Tatikonda first proved that the supremum of the directed information rate of a class of FSCs with feedback is achievable, and introduced a dynamic programming framework to compute the directed information for Markov channels with feedback in [16]. Recently, some efficient dynamic programming algorithms to evaluate the feedback capacities were presented [14, 17–22]. In [14], a value iteration dynamic programming algorithm was introduced to compute the feedback and delayed feedback capacities of controllable FSCs, and in [19] the method was extended to power-constrained Gaussian noise channels with memory. However, the method in [14] is applicable only to the class of controllable FSCs. No similar tool has thus far been proposed for *non-controllable* FSCs, in which the user cannot control channel states. In addition, other coding theorems [23, 24] based on directed information were also proposed for some specific FSCs with feedback. Differing from the method based on directed information, Viswanathan presented a single letter formula of the feedback capacity for the Markov channel with perfect channel state information at the receiver in [25].

In this paper, we consider general non-controllable *indecomposable* FSCs¹ [27] with/without feedback and introduce upper bounds on their capacities. We develop an upper-bounding technique in which the delayed channel state is considered as part of the channel input. We characterize the directed information from the new channel input (including the source and the delayed channel state) sequence to the channel output sequence. Next, we majorize the set of considered channel inputs in order to obtain a method to evaluate the upper bound. Our system is different from that in [28], which assumes that the channel output is fed back with delay and the state information is available with delay at both transmitter and receiver. We construct two nested sequences of upper bounds for feedforward and feedback capacities, respectively. Through three theorems, we show that the upper bounds can be achieved by finite-order conditional Markov sources, conditioned on the delayed feedback (FB) and the delayed

¹Note that for some special non-controllable FSCs such as the Gilbert-Elliott channel [4] and certain Gilbert-Elliott-like channels [26], the capacity-achieving distributions are known, and the feedforward capacities can be evaluated using the tools in [5–8]. For general non-controllable FSCs, however, closely bounding the feedforward capacities and the feedback capacities seems to be the only practical approach.

state information (SI). Similar to [14], we formulate the computation of the upper bound as an average reward per stage stochastic control problem [29, 30] and propose a dynamic programming method to numerically solve this problem. Using a quantized value iteration algorithm we obtain quantized optimal conditional Markov sources, and numerically evaluate the upper bounds by Monte Carlo methods.

Structure: The rest of this paper is structured as follows. The channel model is given in the next section. We introduce the channel capacities of non-controllable FSCs with/without feedback, and develop the upper bounds on the capacities in Section III, followed by three theorems to facilitate the computation of these bounds in Section IV. In Section V, we introduce dynamic programming methods to optimize the source of channel input sequences and then compute the upper bounds by Monte Carlo methods. Some numerical results are presented in Section VI, followed by the conclusion in Section VII.

Notation: A random variable is denoted by an upper-case letter (e.g. X) and its realization is denoted by the corresponding lower-case letter (e.g. x). A vector of random variables $[X_i, X_{i+1}, \dots, X_j]$ is shortly denoted by X_i^j and its realization is denoted by x_i^j . By default, we set $X^j \triangleq X_1^j$ and $x^j \triangleq x_1^j$. The cardinality of a set $\mathcal{X}$ is denoted by $|\mathcal{X}|$.

II. CHANNEL MODEL

Let S_t , X_t and Y_t denote the channel state, the channel input and the channel output at time $t \in \mathbb{Z}$, whose realizations are s_t , x_t and y_t , respectively. Each state s_t is drawn from a finite alphabet $\mathcal{S}$, each input letter x_t is drawn from a finite alphabet $\mathcal{X}$, and each output letter y_t is drawn from a finite or continuous alphabet $\mathcal{Y}$. For ease of notation, we shall consider only the case where the set $\mathcal{Y}$ is finite in this paper. It is straightforward to generalize our results to the channels with continuous output by replacing the probability mass function $\Pr(y)$ with the probability density function $f(y)$.

More specifically, a finite-state channel (FSC) has a state sequence $\mathbf{s} = s_0, s_1, s_2, \dots, s_N$, an input sequence $\mathbf{x} = x_1, x_2, \dots, x_N$ and an output sequence $\mathbf{y} = y_1, y_2, \dots, y_N$. As in [27], we assume that, for an FSC, the channel output y_t and channel state s_t are statistically independent of all channel inputs, outputs and states prior to x_t , y_t and s_{t-1} , if the channel input x_t and channel state s_{t-1} are known. That is,

$$\Pr(y_t, s_t | x^t, s_0^{t-1}, y^{t-1}) = \Pr(y_t, s_t | x_t, s_{t-1}). \quad (1)$$

A non-controllable FSC [10] is a finite-state channel in which the user cannot control channel states, i.e., the channel state evolves freely in the sense that, conditional on s_{t-1} , the state s_t is statistically independent of x^t and y^t . Specifically, we assume that the channel state sequence forms a non-controllable stationary irreducible Markov chain in the sense that

$$\Pr(s_t | s_0^{t-1}, x^t, y^t) = \Pr(s_t | s_{t-1}). \quad (2)$$

This equation implies that $\Pr(s_t | x_t, s_{t-1}, y_t) = \Pr(s_t | s_{t-1})$. Therefore, a non-controllable FSC can be described statistically by the conditional probability $\Pr(y_t, s_t | x^t, s_0^{t-1}, y^{t-1})$ satisfying

$$\Pr(y_t, s_t | x^t, s_0^{t-1}, y^{t-1}) = \Pr(y_t | x_t, s_{t-1}) \Pr(s_t | s_{t-1}). \quad (3)$$


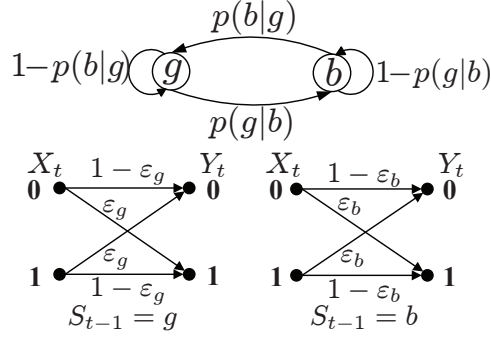
Fig. 1. A trellis section of the RLL(1, ∞) sequence.

Fig. 2. A Gilbert-Elliott channel.

From the assumptions on the FSC discussed above, additional characteristics of the channel used with feedback and without feedback can be distinguished as follows. If there is no feedback, then given the channel state s_{t-1} and channel input x_t , the channel output y_t and state s_t are statistically independent of other channel inputs and prior channel states and outputs, i.e.,

$$\Pr(y_t, s_t | x^N, s_0^{t-1}, y^{t-1}) = \Pr(y_t, s_t | x_t, s_{t-1}). \quad (4)$$

On the other hand, if feedback is allowed (precisely speaking, the output sequence y^{t-1} is available at the transmitter before emitting symbol X_t), then the channel output Y_t statistically affects the future channel inputs X_{t+1}^N . Therefore, instead of (4), we have

$$\Pr(y_t, s_t | x^N, s_0^{t-1}, y^{t-1}) = \Pr(y_t, s_t | x_t^N, s_{t-1}). \quad (5)$$

The non-controllable FSC will be illustrated by the following example related to the Gilbert-Elliott channel.

Example 1 (The RLL(1, ∞)-GE Channel): The channel input is required to be a binary run-length-limited (RLL) sequence satisfying the RLL(1, ∞) constraint, i.e., there are no consecutive ones in the sequence (see Fig. 1). The channel is a Gilbert-Elliott channel with two states (see Fig. 2), a “good” state and a “bad” state. Denote the channel state alphabet by $\mathcal{S} \triangleq \{g, b\}$. The transition probabilities between channel states are $p(b|g) \triangleq \Pr(S_t = b | S_{t-1} = g)$ and $p(g|b) \triangleq \Pr(S_t = g | S_{t-1} = b)$. When the channel state is “good”, i.e., $S_t = g$, the channel acts as a binary symmetric channel (BSC) with cross-over probability ε_g . When the channel is “bad”, i.e., $S_t = b$, the channel is a BSC with cross-over probability ε_b . $\square$

III. CHANNEL CAPACITIES AND UPPER BOUNDS

A. Channel Capacities

In order to unify the presentations of both channel capacities (the feedforward capacity and the feedback capacity), we use the notion of directed information, which was introduced by Massey in [15]. For any given joint probability distribution $\Pr(X^N, Y^N)$, the directed information from the channel input sequence X^N and channel output sequence Y^N is defined as

$$I(X^N \rightarrow Y^N) \triangleq \sum_{t=1}^N I(X^t; Y_t | Y^{t-1}).$$

It has been shown that $I(X^N \rightarrow Y^N) \leq I(X^N; Y^N)$ with equality if the channel is used without feedback, and that the directed information can characterize the feedback capacity of an FSC as shown by the coding theorems in [18, 23, 24]. For simplicity, we denote $\mathcal{I}(X \rightarrow Y)$ as the directed information rate² from the channel input to the channel output, that is,

$$\mathcal{I}(X \rightarrow Y) \triangleq \lim_{N \rightarrow \infty} \frac{1}{N} I(X^N \rightarrow Y^N). \quad (6)$$

In this paper, we use the following definitions of channel capacities for FSCs.

Definition 1: The feedforward capacity of an indecomposable FSC is given by

$$C = \sup_{\{\Pr(x_t | x^{t-1})\}} \mathcal{I}(X \rightarrow Y) \quad (7)$$

where that the supremum is taken over all stationary channel input processes. The feedback capacity of an indecomposable FSC is given by

$$C^{fb} = \sup_{\{\Pr(x_t | x^{t-1}, y^{t-1})\}} \mathcal{I}(X \rightarrow Y) \quad (8)$$

where the supremum is taken over stationary channel input processes that are causally dependent on the past channel outputs. This means that all past channel outputs Y^{t-1} must be fed back to the source before emitting the symbol X_t .

For a controllable FSC, such as the intersymbol interference channel, Yang *et al.* [14] proved that the feedback capacity can be achieved by feedback-dependent Markov sources with the same memory length as the channel's. They also showed that the (delayed) feedback capacity can be estimated by dynamic programming and can be utilized to tightly upper-bound the feedforward capacity. For a non-controllable FSC, since the user cannot control channel states, the computation of capacities in (7) and (8) is cumbersome. The main objective of this paper is to develop numerically computable upper bounds on the capacities of non-controllable FSCs with/without feedback.

²We note that the limit in (6) may not exist for all channels and all sources. In that case, the "lim inf" should be used instead of "lim". However, in this paper, we consider only indecomposable channels and stationary channel inputs, in which the limit in (6) does exist.

B. Upper Bounds on Capacities

Motivated by but differing from the work of Tatikonda [16], in which the perfect channel state is assumed to be known at the receiver, we make an assumption that the channel state is available at the transmitter and insert a state sequence into the definition of directed information as follows.

Definition 2: For stationary processes $\{X_t\}$, define $\mathcal{I}_v(X, S \rightarrow Y)$ as the following information rate³

$$\mathcal{I}_v(X, S \rightarrow Y) \triangleq \lim_{N \rightarrow \infty} \frac{1}{N} \sum_{t=1}^N I(X^t, S_0^{t-v-1}; Y_t | Y^{t-1}). \quad (9)$$

□

Evidently, $\mathcal{I}_v(X, S \rightarrow Y)$ is a directed information rate from the new channel input (including the source and the delayed channel state) to the channel output. In other words, in (9) we consider the delayed channel state as a part of the channel input. Obviously, for a given channel input process, there is a nested sequence of upper bounds on $\mathcal{I}(X \rightarrow Y)$ as

$$\mathcal{I}(X \rightarrow Y) \leq \cdots \leq \mathcal{I}_{v+1}(X, S \rightarrow Y) \leq \mathcal{I}_v(X, S \rightarrow Y) \leq \cdots \leq \mathcal{I}_0(X, S \rightarrow Y). \quad (10)$$

Furthermore, if we take the supremum over the corresponding sets of stationary input processes, the capacities in Definition 1 can be bounded as

$$\begin{aligned} C &\leq \sup_{\{\Pr(x_t | x^{t-1})\}} \mathcal{I}_v(X, S \rightarrow Y) \\ C^{fb} &\leq \sup_{\{\Pr(x_t | x^{t-1}, y^{t-1})\}} \mathcal{I}_v(X, S \rightarrow Y). \end{aligned} \quad (11)$$

These upper bounds, however, can not be easily evaluated because the source sets are too general to be specified with few parameters. To develop simpler expressions for upper bounds, we need define the following sources in a similar way to that in [31].

Definition 3: Assume that the ***u*-delayed output feedback (FB)** Y^{t-u-1} , and the ***v*-delayed state information (SI)** S_0^{t-v-1} are available at the source just before the emission of X_t (see Fig. 3). Then the channel input X_t could be selected according to a preset conditional probability law $\Pr(x_t | x^{t-1}, s_0^{t-v-1}, y^{t-u-1})$. All such input processes $\{X_t\}$ are described by a set $\mathcal{P}(u, v)$, i.e.,

$$\mathcal{P}(u, v) \triangleq \{\Pr(x_t | x^{t-1}, s_0^{t-v-1}, y^{t-u-1})\}.$$


In words, $\mathcal{P}(u, v)$ represents the set of all sources (channel inputs) with *u*-delayed FB and *v*-delayed SI. □

Note that the delays *u* and *v* are both non-negative. An important subclass of sources from $\mathcal{P}(u, v)$, called conditional Markov source, is defined as follows.

Definition 4: For $v \leq m$, a source sequence $\{X_t\}$ used with *u*-delayed FB and *v*-delayed SI is said to be an ***m*-th order conditional Markov source** if the conditional probability mass function satisfies

$$\Pr(x_t | x^{t-1}, s_0^{t-v-1}, y^{t-u-1}) = \Pr(x_t | x_{t-m}^{t-1}, s_{t-m-1}^{t-v-1}, y^{t-u-1}).$$

³In Section V, we will see that maximizing $\mathcal{I}_v(X, S \rightarrow Y)$ is considered to be a stochastic control problem, which has a stationary policy as a solution and implies that the limit in (9) does exist for those distributions that maximize $\mathcal{I}_v(X, S \rightarrow Y)$, see [14, 16, 29, 30].

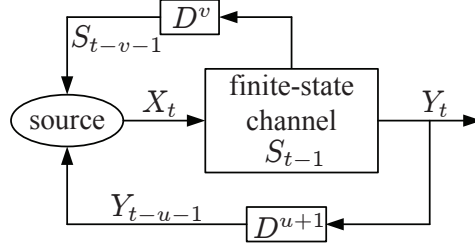Fig. 3. A non-controllable FSC model with u -delayed FB and v -delayed SI.

Let $\mathcal{P}_m(u, v)$ represent the set of all such sources, that is,

$$\mathcal{P}_m(u, v) \triangleq \{\Pr(x_t | x_{t-m}^{t-1}, s_{t-m-1}^{t-v-1}, y_{t-u-1}^{t-1})\}.$$

□

From the definitions of sources $\mathcal{P}(u, v)$ and $\mathcal{P}_m(u, v)$, we have the following facts for non-negative u, v and m .

- The sets of stationary channel input processes $\{\Pr(x_t | x_{t-1}^{t-1})\}$ and $\{\Pr(x_t | x_{t-1}^{t-1}, y_{t-1}^{t-1})\}$ are subsets of the conditional source sets $\mathcal{P}(u, v)$ and $\mathcal{P}(0, v)$, respectively.
- $\mathcal{P}(u+1, v+1) \subseteq \mathcal{P}(u+1, v) \subseteq \mathcal{P}(u, v)$ and $\mathcal{P}(u+1, v+1) \subseteq \mathcal{P}(u, v+1) \subseteq \mathcal{P}(u, v)$.
- If $v+1 \leq m$, then $\mathcal{P}_m(u+1, v+1) \subseteq \mathcal{P}_m(u+1, v) \subseteq \mathcal{P}_m(u, v)$ and $\mathcal{P}_m(u+1, v+1) \subseteq \mathcal{P}_m(u, v+1) \subseteq \mathcal{P}_m(u, v)$.
- If $v \leq m$, then $\mathcal{P}_m(u, v) \subseteq \mathcal{P}_{m+1}(u, v) \subseteq \dots \subseteq \mathcal{P}(u, v)$.

Moreover, we can prove the following proposition.

Proposition 1: For a non-controllable FSC with sources in the set $\mathcal{P}(u, u)$,

$$\Pr(y_t, s_t | x_{t+u}^{t+u}, s_0^{t-1}, y^{t-1}) = \Pr(y_t, s_t | x_t, s_{t-1}). \quad (12)$$

□

Proof: From equation (5), we have

$$\begin{aligned} \Pr(y_t, s_t | x_{t+u}^{t+u}, s_0^{t-1}, y^{t-1}) &= \Pr(y_t, s_t | x_t^{t+u}, s_{t-1}) \\ &= \Pr(y_t, s_t | x_t, s_{t-1}) \frac{\Pr(x_{t+1}^{t+u} | x_t, s_{t-1}, y_t)}{\Pr(x_{t+1}^{t+u} | x_t, s_{t-1})}. \end{aligned}$$

By Definition 3, given x_t and s_{t-1} , the inputs x_{t+1}^{t+u} are statistically independent of the output y_t and the state s_t which implies that the fraction above equals 1. ■

Proposition 1 implies that the probability $\Pr(y_t, s_t | x_{t+u}^{t+u}, s_0^{t-1}, y^{t-1})$ are unaffected by the source selection from $\mathcal{P}(u, u)$ and that the probability $\Pr(y_t, s_t | x_{t+u}^{t+u}, s_0^{t-1}, y^{t-1})$ can be characterized by the channel only. From the definition of sources $\mathcal{P}(u, v)$, we directly introduce a supremum as follows, which will be shown to be an upper bound on the capacity of the non-controllable FSC.

Definition 5: Define $\mathcal{I}_{FB, SI}^*(u, v)$ as the supremum of the information rate $\mathcal{I}_v(X, S \rightarrow Y)$ over all sources $\mathcal{P}(u, u)$ used with u -delayed FB and u -delayed SI, that is,

$$\mathcal{I}_{FB, SI}^*(u, v) \triangleq \sup_{\mathcal{P}(u, u)} \mathcal{I}_v(X, S \rightarrow Y). \quad (13)$$

□

Combining the inequalities in (11) with the discussion after Definition 3 and 4, we conclude this section with the following proposition.

Proposition 2: 1) For any $u \geq 0$ and $v \geq 0$, we have

$$\mathcal{I}_{FB,SI}^*(u+1, v+1) \leq \mathcal{I}_{FB,SI}^*(u+1, v) \leq \mathcal{I}_{FB,SI}^*(u, v)$$

and

$$\mathcal{I}_{FB,SI}^*(u+1, v+1) \leq \mathcal{I}_{FB,SI}^*(u, v+1) \leq \mathcal{I}_{FB,SI}^*(u, v).$$

2) For any $v \geq 1$, we have a nested sequence of upper bounds on the feedforward capacity

$$C \leq \dots \leq \mathcal{I}_{FB,SI}^*(v, v) \leq \dots \leq \mathcal{I}_{FB,SI}^*(1, 1) \leq \mathcal{I}_{FB,SI}^*(0, 0).$$

3) For any $v \geq 1$, we have a nested sequence of upper bounds on the feedback capacity

$$C^{fb} \leq \dots \leq \mathcal{I}_{FB,SI}^*(0, v) \leq \dots \leq \mathcal{I}_{FB,SI}^*(0, 1) \leq \mathcal{I}_{FB,SI}^*(0, 0).$$

□

Proof: It is straightforward and omitted here. ■

IV. THREE THEOREMS FOR UPPER BOUNDS

In this section, we introduce three main theorems that simplify the expressions for the upper bounds presented in Proposition 2 on the capacities of non-controllable FSCs.

Theorem 1: Let $v \geq 0$. For non-controllable FSCs,

$$I(X^t, S_0^{t-v-1}; Y_t | Y^{t-1}) = I(X_{t-v}^t, S_{t-v-1}; Y_t | Y^{t-1}) \quad (14)$$

and the information rate $\mathcal{I}_v(X, S \rightarrow Y)$ in (9) can be simplified as

$$\mathcal{I}_v(X, S \rightarrow Y) = \lim_{N \rightarrow \infty} \frac{1}{N} \sum_{t=1}^N I(X_{t-v}^t, S_{t-v-1}; Y_t | Y^{t-1}). \quad (15)$$

□

Proof: See Appendix A. ■

Theorem 2: Let $0 \leq u \leq v$. The supremum $\mathcal{I}_{FB,SI}^*(u, v)$ is achieved by a v -th order conditional Markov source with u -delayed FB and u -delayed SI, that is,

$$\mathcal{I}_{FB,SI}^*(u, v) = \sup_{\mathcal{P}_v(u, u)} \mathcal{I}_v(X, S \rightarrow Y)$$

where $\mathcal{P}_v(u, u) = \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})\}$. □

Proof: See Appendix B. ■

By Theorem 2, to evaluate the supremum $\mathcal{I}_{FB,SI}^*(u, v)$, it is necessary to search the whole set of conditional probabilities $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}), t = 1, 2, \dots\}$. As time t increases, the space of sequences y^{t-u-1} expands exponentially, which makes it complicated to keep track of the dependence of the process X_t on Y^{t-u-1} . In the sequel, we find some finite-size sufficient statistics to represent the sequence y^{t-u-1} .

Let $\mathcal{M}$ be the Cartesian product $\mathcal{X}^v \times \mathcal{S}^{v-u+1}$ whose elements are indexed simply by $\ell \in \{0, 1, \dots, M-1\}$ with $M = |\mathcal{M}|$. A random vector $\underline{A}_t$ is specified as the *a posteriori* probability vector with realization

$$\underline{\alpha}_t \triangleq [\alpha_t(0), \alpha_t(1), \dots, \alpha_t(M-1)] \quad (16)$$

where

$$\alpha_t(\ell) \triangleq \Pr((X_{t-v+1}^t, S_{t-v}^{t-u}) = \ell | y^{t-u}) \quad (17)$$

for $\ell \in \{0, 1, \dots, M-1\}$. The sample space of the random vector $\underline{A}_t$ is denoted by $\mathcal{A}$, which is a simplex in $\mathbb{R}^M$. That is, $\mathcal{A} = \{\underline{\alpha} = [\alpha(0), \dots, \alpha(M-1)] : \alpha(i) \geq 0, \sum_{i=0}^{M-1} \alpha(i) = 1\}$. Given $\underline{\alpha}_{t-1}$, y_{t-u} and the set of transition probabilities $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})\}$, we can use the forward recursion of the BCJR algorithm [32] to compute all values of $\alpha_t(\ell)$ as

$$\alpha_t(x_{t-v+1}^t, s_{t-v}^{t-u}) = \frac{\sum_{x_{t-v}, s_{t-v-1}^{t-u-1}} \Pr(x_{t-v}^t, s_{t-v-1}^{t-u-1}, y_{t-u} | y^{t-u-1})}{\sum_{x_{t-v}, s_{t-v-1}^{t-u-1}} \Pr(x_{t-v}^t, s_{t-v-1}^{t-u-1}, y_{t-u} | y^{t-u-1})} \quad (18)$$

where

$$\begin{aligned} & \Pr(x_{t-v}^t, s_{t-v-1}^{t-u-1}, y_{t-u} | y^{t-u-1}) \\ & \stackrel{(a)}{=} \alpha_{t-1}(x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}) \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) \Pr(y_{t-u}, s_{t-u} | x_{t-u}, s_{t-u-1}). \end{aligned} \quad (19)$$

The equality (a) results from Proposition 1 and the assumption $u \leq v$. From (19), we know that, once the prior conditional probability vector $\underline{\alpha}_{t-1}$ is given, the current conditional probability vector $\underline{\alpha}_t$ depends *only* on the current transition probability $\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})$ and the channel transition law. To shorten the notation, we abbreviate (18) and (19) as

$$\underline{\alpha}_t = F_{BCJR}(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})\}, y_{t-u}). \quad (20)$$

Evidently, the vector α_{t-1} depends on y^{t-u-1} , and two different sequences y^{t-u-1} and $\tilde{y}^{t-u-1}$ may result in the same α_{t-1} . For an arbitrarily selected source from $\mathcal{P}_v(u, u)$, two different sequences y^{t-u-1} and $\tilde{y}^{t-u-1}$ may have $\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) \neq \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \tilde{y}^{t-u-1})$. However, there do exist sources such that different y^{t-u-1} and $\tilde{y}^{t-u-1}$ resulting in the same vectors $\underline{\alpha}_{t-1} = \tilde{\alpha}_{t-1}$ have $\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) = \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \tilde{y}^{t-u-1})$. Such a subclass of $\mathcal{P}_v(u, u)$ is defined as follows.

Definition 6: The set $\mathcal{P}'_v(u, u)$ collects all the v -th order conditional Markov sources with u -delayed FB and u -delayed SI such that

$$\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) = \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \tilde{y}^{t-u-1})$$

whenever $\underline{\alpha}_{t-1} = \tilde{\alpha}_{t-1}$. Hence, the source set $\mathcal{P}'_v(u, u)$ can be shortly denoted by

$$\mathcal{P}'_v(u, u) \triangleq \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}.$$

□

Fig. 4 depicts the non-controllable FSC model, whose source belongs to the set $\mathcal{P}'_v(u, u)$.

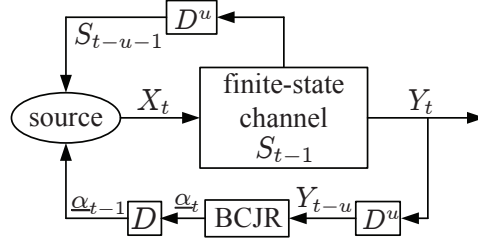


Fig. 4. A non-controllable FSC whose source is in the set $\mathcal{P}'_v(u, u)$.

Theorem 3: Let $u \leq v$. The supremum $\mathcal{I}_{FB, SI}^*(u, v)$ can be achieved by a source in the set $\mathcal{P}'_v(u, u)$, that is,

$$\mathcal{I}_{FB, SI}^*(u, v) = \sup_{\mathcal{P}'_v(u, u)} \mathcal{I}_v(X, S \rightarrow Y) \quad (21)$$

where $\mathcal{P}'_v(u, u) = \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}$. □

Proof: See Appendix C. ■

V. DYNAMIC PROGRAMMING FOR SOURCE OPTIMIZATION

A. Stochastic Control Formulation

From Theorem 3, we only need to consider the sources in the set $\mathcal{P}'_v(u, u)$. In this setting, for any given y^{t-u-1} , we have

$$\begin{aligned} \Pr(x_{t-v}^t, s_{t-v-1}^t, y_{t-u}^t | y^{t-u-1}) &= \sum_{s_{t-v}^{t-u}} \Pr(x_{t-v}^t, s_{t-v-1}^{t-u}, y_{t-u}^t | y^{t-u-1}) \\ &\stackrel{(a)}{=} \sum_{s_{t-v}^{t-u}} \Pr(x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1} | y^{t-u-1}) \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) \\ &\quad \times \Pr(y_{t-u}, s_{t-u} | x_{t-u}, s_{t-u-1}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}) \\ &\stackrel{(b)}{=} \sum_{s_{t-v}^{t-u}} \alpha_{t-1}(x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}) \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1}) \\ &\quad \times \Pr(y_{t-u}, s_{t-u} | x_{t-u}, s_{t-u-1}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}) \end{aligned} \quad (22)$$

where equality (a) results from Proposition 1 and the assumption $u \leq v$, and equality (b) results directly from the definition of the source set $\mathcal{P}'_v(u, u)$. Similar to equation (40) as shown in Appendix B, we can prove that the conditional probability $\Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u})$ is completely determined by the channel law. Therefore, equalities in (22) indicate that the joint conditional probability mass function on the left-hand side of (22) is not sensitive to the vector y^{t-u-1} (that appears in the conditioning clause) but to its induced variable $\underline{\alpha}_{t-1}$. This implies that

$$I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y_{t-u+1}^{t-1}, y_{t-u}, y^{t-u-1}) = I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y_{t-u+1}^{t-1}, y_{t-u}, \underline{\alpha}_{t-1}) \quad (23)$$

of which the right-hand side is a function of $\underline{\alpha}_{t-1}$, $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}$ and y_{t-u} . For simplicity, this function is denoted as

$$g(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}, y_{t-u}) \triangleq I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y_{t-u+1}^{t-1}, y_{t-u}, \underline{\alpha}_{t-1}). \quad (24)$$

Therefore, we can rewrite the information rate $\mathcal{I}_v(X, S \rightarrow Y)$ in (15) as

$$\begin{aligned} \mathcal{I}_v(X, S \rightarrow Y) &= \lim_{N \rightarrow \infty} \frac{1}{N} \sum_{t=1}^N I(X_{t-v}^t, S_{t-v-1}; Y_t | Y_{t-u+1}^{t-1}, Y^{t-u}) \\ &= \lim_{N \rightarrow \infty} \frac{1}{N} \mathbf{E}_{Y^{N-u}} \left[\sum_{t=1}^N g(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}, Y_{t-u}) \right]. \end{aligned} \quad (25)$$

Substituting (25) into (21), we can see that the problem to find the upper bound $\mathcal{I}_{FB,SI}^*(u, v)$ is equivalent to an infinite-horizon average reward per stage stochastic control problem [29, 30]. In fact, the stochastic control system has the form

$$\underline{\alpha}_t = F_{BCJR}(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}, y_{t-u}) \quad (26)$$

where $\underline{\alpha}_{t-1} \in \mathcal{A}$ is the state of the dynamic system, $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}$ is the *policy* or *control*, and y_{t-u} is the *system disturbance*. The *reward function* at stage t is $g(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}, y_{t-u})$. The Bellman equation [29, 30] is, for any state $\underline{\alpha}_{t-1} \in \mathcal{A}$,

$$\sigma + \mathcal{J}(\underline{\alpha}_{t-1}) = \max_{\mathcal{P}_t^*(u, u)} \{ \Phi(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}) + \mathbf{E}[\mathcal{J}(\underline{A}_t) | \underline{\alpha}_{t-1}] \} \quad (27)$$

where σ is the *optimal average reward*, $\mathcal{J}(\underline{\alpha})$ is the *optimal relative reward-to-go function*, $\underline{A}_t$ is the random variable with realization $\underline{\alpha}_t$ whose randomness depends on the disturbance variable Y_{t-u} , and

$$\begin{aligned} \Phi(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}) &\triangleq \mathbf{E}_{Y_{t-u}} [g(\underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}, Y_{t-u})] \\ &= I(X_{t-v}^t, S_{t-v-1}; Y_t | Y_{t-u}^{t-1}, \underline{\alpha}_{t-1}). \end{aligned} \quad (28)$$

Proposition 3: The system disturbance variable Y_{t-u} is characterized by a conditional probability distribution that depends explicitly on the system state $\underline{\alpha}_{t-1}$ and the policy $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}$.

Proof: Given the system state $\underline{\alpha}_{t-1}$ and the policy $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}$, the probability mass function of the system disturbance can be explicitly determined as

$$\begin{aligned} \Pr(y_{t-u} | \underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}) \\ &= \sum_{x_{t-v}^t, s_{t-v-1}^{t-u}} \Pr(x_{t-v}^t, s_{t-v-1}^{t-u}, y_{t-u} | \underline{\alpha}_{t-1}, \{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})\}) \\ &\stackrel{(a)}{=} \sum_{x_{t-v}^t, s_{t-v-1}^{t-u}} \alpha_{t-1}(x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}) \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1}) \Pr(y_{t-u}, s_{t-u} | x_{t-u}, s_{t-u-1}) \end{aligned} \quad (29)$$

where the equality (a) follows from Proposition 1 and the assumption $u \leq v$. ■

Proposition 4: The state process $\underline{A}_t$ with realization $\underline{\alpha}_t$ is a Markov process. □

Proof: Equation (26) and Proposition 3 imply that, given the prior state $\underline{A}_{t-1}$, the current state $\underline{A}_t$ is independent of $\underline{A}_0^{t-2}$, that is, $\underline{A}_t$ is a Markov process. ■

Theorem 4: There exist a scalar σ^* and a function $\{\mathcal{J}^*(\underline{\alpha}) : \underline{\alpha} \in \mathcal{A}\}$ that satisfy Bellman's equation (27). Furthermore, there exists a stationary policy to solve the Bellman equation.

Proof: The considered average reward per stage stochastic control problem can be reformulated as a discounted cost dynamic problem by [30, Ch. 4]. For this dynamic problem, we have the following facts. Firstly, the state

space $\mathcal{A}$ is a Borel subset of a Polish (complete, separable metric) space. Secondly, the policy space $\{\Pr(j|i, \underline{\alpha})\}$ is a compact metric space. Thirdly, the reward function Φ is bounded and continuous. Fourthly, once the state α_{t-1} and the policy are given, the transition probability of the next state α_t is determined. Then, we can complete the proof of this theorem by the theorem in [33, Ch.6, Theorem 4.1].

An alternative proof of this theorem follows from the proposition in [30, Proposition 4.6.5]. $\blacksquare$

From Theorem 4, it suffices to investigate only stationary policies. For convenience, the stationary policy in the set $\mathcal{P}'_v(u, u)$ is denoted by

$$\{\Pr(j|i, \underline{\alpha})\} \triangleq \{\Pr(X_t = j | (X_{t-v}^{t-1}, S_{t-v-1}^{t-u-1}) = i, \underline{A}_{t-1} = \underline{\alpha})\}.$$

We note that the information rate $\mathcal{I}_v(X, S \rightarrow Y)$ in (25) induced by a stationary source $\{\Pr(j|i, \underline{\alpha})\}$ can be computed using Monte Carlo methods similar to those in [5–8].

B. Value Iteration Algorithm to Optimize the Source

For an average reward per stage stochastic control problem, there exist several efficient dynamic programming algorithms (such as value iteration, policy iteration and linear programming) [29, 30] to solve Bellman's equation and find an optimal stationary policy. In this subsection, a value iteration algorithm to optimize the stationary Markov source $\{\Pr(j|i, \underline{\alpha})\}$ is described. Initially, we choose a terminal reward function $J_0(\underline{\alpha}) = 0$ for any $\underline{\alpha}$. Then, the optimal k -stage reward-to-go functions $J_k(\underline{\alpha})$ ($k = 1, 2, \dots$) are recursively generated by

$$J_k(\underline{\alpha}) = \max_{\{\Pr(j|i, \underline{\alpha})\}} \left\{ \Phi(\underline{\alpha}, \{\Pr(j|i, \underline{\alpha})\}) + \mathbf{E} [J_{k-1}(\underline{A}') | \underline{\alpha}] \right\} \quad (30)$$

where $\underline{A}'$ is the random variable whose randomness depends on the system disturbance variable Y_{t-u} , and where the realization $\underline{\alpha}'$ of $\underline{A}'$ can be computed by the BCJR algorithm as

$$\underline{\alpha}' = F_{BCJR}(\underline{\alpha}, \{\Pr(j|i, \underline{\alpha})\}, y_{t-u}). \quad (31)$$

Moreover, an optimal policy is obtained at stage k as

$$\{\Pr(j|i, \underline{\alpha})\}_k^* = \arg \max_{\{\Pr(j|i, \underline{\alpha})\}} \left\{ \Phi(\underline{\alpha}, \{\Pr(j|i, \underline{\alpha})\}) + \mathbf{E} [J_{k-1}(\underline{A}') | \underline{\alpha}] \right\}. \quad (32)$$

The information rate $\mathcal{I}_v(X, S \rightarrow Y)$ induced by the stationary source $\{\Pr(j|i, \underline{\alpha})\}_k^*$ converges to the maximum $\sigma^* = \mathcal{I}_{FB, SI}^*(u, v)$ when k goes to infinite [29, 30]. Thus, the source distribution determined by (32) is an optimal source distribution as k goes to infinite.

In general, it is infeasible to find the optimal stationary policy in closed form using the value iteration algorithm. The following is a quantized numerical approximation of the value iteration algorithm.

Algorithm 1 (Quantized Value Iteration Algorithm):

1) Initialization:

- Choose a large positive integer n .
- Choose a finite quantizer $\hat{\underline{\alpha}} = \mathcal{Q}(\underline{\alpha})$.

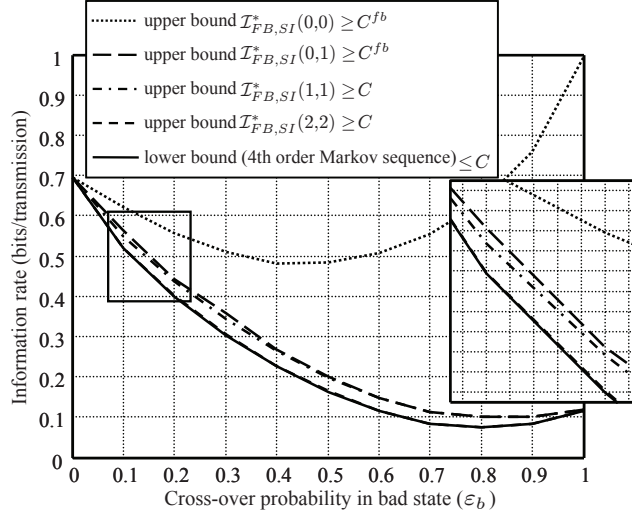


Fig. 5. Bounds on the capacities of the RLL(1, ∞)-GE channel.

- Initialize the terminal reward function as $J_0(\hat{\underline{\alpha}}) = 0$ for all $\hat{\underline{\alpha}}$.

2) Recursions:

For $k=1, 2, \dots, n$, and any $\hat{\underline{\alpha}}$, compute the k -stage reward-to-go functions as

$$J_k(\hat{\underline{\alpha}}) = \max_{\{\Pr(j|i, \hat{\underline{\alpha}})\}} \left\{ \Phi(\hat{\underline{\alpha}}, \{\Pr(j|i, \hat{\underline{\alpha}})\}) + \mathbf{E} \left[J_{k-1}(\hat{\underline{A}}') \middle| \hat{\underline{\alpha}} \right] \right\}. \quad (33)$$

where $\hat{\underline{A}}'$ is the random variable whose randomness depends on the system disturbance variable Y_{t-u} , and where the realization $\hat{\underline{\alpha}}'$ of $\hat{\underline{A}}'$ can be computed by

$$\hat{\underline{\alpha}}' = \mathcal{Q}(F_{BCJR}(\hat{\underline{\alpha}}, \{\Pr(j|i, \hat{\underline{\alpha}})\}, y_{t-u})). \quad (34)$$

3) Optimized source:

For any $\hat{\underline{\alpha}}$, the optimized source distribution is delivered as

$$\{\Pr(j|i, \hat{\underline{\alpha}})\} = \arg \max_{\{\Pr(j|i, \hat{\underline{\alpha}})\}} \left\{ \Phi(\hat{\underline{\alpha}}, \{\Pr(j|i, \hat{\underline{\alpha}})\}) + \mathbf{E} \left[J_n(\hat{\underline{A}}') \middle| \hat{\underline{\alpha}} \right] \right\}. \quad (35)$$

Remark: To perform Algorithm 1, the stationary Markov source probabilities $\{\Pr(j|i, \hat{\underline{\alpha}})\}$ are approximated by their discretized versions. The maximizations in (33) and (35) are then implemented by exhaustive searches. Thus, the optimality of the resulting source distribution (35) is limited by the resolution of the quantizers involved. Strictly speaking, the information rate $\mathcal{I}_v(X, S \rightarrow Y)$ induced by the “optimal” *quantized* source obtained in (35) is only a lower bound on the upper bound $\mathcal{I}_{FB,SI}^*(u, v)$. Intuitively, finer quantizers should cause less loss of optimality. This intuition is verified by the numerical results shown in the following section.

VI. NUMERICAL RESULTS

In this section, we present numerical results by taking the RLL(1, ∞)-GE channel shown in Fig. 1 and Fig. 2 as an example. We chose this channel because it was already used in a prior publication [10]. In this example, we

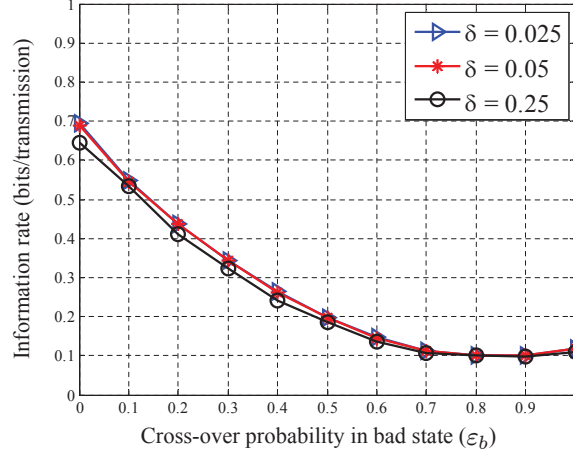


Fig. 6. Information rates $\mathcal{I}_1(X, S \rightarrow Y)$ for “optimal” quantized sources in $\mathcal{P}'_1(1, 1)$ delivered by Algorithm 1 with different quantizers, where δ is the quantization parameter.

set the transition probabilities between the channel states as $p(b|g) = p(g|b) = 0.3$, the cross-over probability in the “good” state as $\varepsilon_g = 0.001$ and the cross-over probability in the “bad” state as a variable $\varepsilon_b \in [0, 1]$. We first apply the quantized value iteration algorithm in Section V to optimize the sources and then use Monte-Carlo methods [5–8] to numerically evaluate the upper bounds $\mathcal{I}_{FB,SI}^*(u, v)$. The results are shown in Fig. 5, where $\mathcal{I}_{FB,SI}^*(1, 1)$ and $\mathcal{I}_{FB,SI}^*(2, 2)$ are two upper bounds on the feedforward capacity, and $\mathcal{I}_{FB,SI}^*(0, 0)$ and $\mathcal{I}_{FB,SI}^*(0, 1)$ are two upper bounds on the feedback capacity. As expected, $\mathcal{I}_{FB,SI}^*(2, 2) \leq \mathcal{I}_{FB,SI}^*(1, 1) \leq \mathcal{I}_{FB,SI}^*(0, 1) \leq \mathcal{I}_{FB,SI}^*(0, 0)$. It is worth pointing out that, due to the RLL constraints, the source must have memory of order at least one and the optimization is implemented by taking into account the RLL constraint. In particular, the upper bound $\mathcal{I}_{FB,SI}^*(0, 0)$ is obtained by optimizing the sources $\mathcal{P}_1(0, 0)$. Also shown in Fig. 5 is a lower bound on C computed using techniques presented in [9, 10]. By comparing $\mathcal{I}_{FB,SI}^*(2, 2)$ with the lower bound, we observe that the bounds $\mathcal{I}_{FB,SI}^*(v, v)$ are numerically tight upper bounds on the feedforward capacity. We are unable to evaluate the tightness of the upper bounds $\mathcal{I}_{FB,SI}^*(0, v)$ on the feedback capacity since no good lower bounds on C^{fb} are available in the literature for non-controllable FSCs.

Fig. 6 illustrates the loss of the optimality caused by quantization. We focus on the computation of $\mathcal{I}_{FB,SI}^*(1, 1)$. In this case, the state variable $\underline{\alpha}$ has four components. Let $\delta > 0$ be the quantization parameter. The quantized state variable $\hat{\underline{\alpha}}$ is determined by $\hat{\alpha}(i) = \left\lceil \frac{\alpha(i)}{\delta} \right\rceil * \delta$, where $\lceil x \rceil$ stands for the closest integer to x . If necessary, slight adjustment is required to guarantee that $\sum_i \hat{\alpha}(i) = 1$. For example, for $\delta = 0.1$, the vector $\underline{\alpha} = [0.12, 0.25, 0.375, 0.255]$ is approximated by the vector $\hat{\underline{\alpha}} = [0.1, 0.2, 0.4, 0.3]$. From Fig. 6, we can see that a smaller δ (equivalently, a finer quantizer) induces a larger information rate $\mathcal{I}_v(X, S \rightarrow Y)$ and causes less loss of optimality. It can also be seen that the gap between the different quantizers is negligible for small quantization parameters δ .

VII. CONCLUSION

We have developed a universal form of upper bounds on the capacities of non-controllable FSCs with/without feedback. We obtained two nested sequences $\{\mathcal{I}_{FB,SI}^*(v, v)\}$ and $\{\mathcal{I}_{FB,SI}^*(0, v)\}$ of upper bounds on feedforward capacities and feedback capacities, respectively, where the upper bound $\mathcal{I}_{FB,SI}^*(u, v)$ is the supremum of the directed information rate $\mathcal{I}_v(X, S \rightarrow Y)$ from the new channel input (including the source and the delayed channel state) to the channel output. These upper bounds can be achieved by v -th order conditional Markov sources $\mathcal{P}'_v(u, u)$ with u -delayed output feedback (FB) and u -delayed state information (SI). Moreover, the computation of the upper bounds $\mathcal{I}_{FB,SI}^*(u, v)$ can be formulated as an average reward per stage stochastic control problem [29, 30]. Using a quantized value iteration algorithm, a quantized (sub)optimal conditional Markov source is obtained and upper bounds are numerically evaluated using Monte Carlo methods [5–8].

APPENDIX A

PROOF OF THEOREM 1

Proof: For any $v \geq 0$, by using chain rule for mutual information, we have

$$I(X^t, S_0^{t-v-1}; Y_t | Y^{t-1}) = I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1}) + I(X^{t-v-1}, S_0^{t-v-2}; Y_t | Y^{t-1}, X_{t-v}^t, S_{t-v-1}^t). \quad (36)$$

The last term equals zero, since Y_t is independent of S_0^{t-v-2} and X^{t-v-1} if s_{t-v-1} , x_{t-v}^t and y^{t-1} are given. ■

APPENDIX B

PROOF OF THEOREM 2

Proof: Let $\mathcal{P}_1 \in \mathcal{P}(u, u)$ be an arbitrary source with u -delayed FB and u -delayed SI. Denote the corresponding information as $I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1})$. To prove Theorem 2, it is sufficient to show that there exists a conditional Markov source $\mathcal{P}_2$ in $\mathcal{P}_v(u, u) \subseteq \mathcal{P}(u, u)$ with the same information $I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1})$. To do this, for any given $\mathcal{P}_1 \in \mathcal{P}(u, u)$, we construct a new source $\mathcal{P}_2 \in \mathcal{P}_v(u, u)$ as

$$\Pr^{(\mathcal{P}_2)}(x_t | x^{t-1}, s_0^{t-u-1}, y^{t-u-1}) \triangleq \Pr^{(\mathcal{P}_1)}(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) \quad (37)$$

with the initial probability as $\Pr^{(\mathcal{P}_2)}(x^v, s_0^{v-u}, y^{v-u}) \triangleq \Pr^{(\mathcal{P}_1)}(x^v, s_0^{v-u}, y^{v-u})$.

In the following, we will prove that both $\mathcal{P}_1$ and $\mathcal{P}_2$ induce the same joint probability distribution $\Pr(x_{t-v}^t, s_{t-v-1}^t, y^t)$, which, together with the result of Theorem 1, completes the proof of Theorem 2.

Actually, for any source with u -delayed FB and u -delayed SI, we have

$$\begin{aligned} \Pr(x_{t-v}^t, s_{t-v-1}^t, y^t) &= \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr(x^t, s_0^{t-u}, y^t) \\ &= \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr(x^t, s_0^{t-u}, y^{t-u}) \Pr(y_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u}) \\ &= \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \prod_{\tau=1}^t \Pr(x_\tau | x^{\tau-1}, s_0^{\tau-u-1}, y^{\tau-u-1}) \Pr(y_{\tau-u}, s_{\tau-u} | x^\tau, s_0^{\tau-u-1}, y^{\tau-u-1}) \\ &\quad \times \Pr(y_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u}). \end{aligned} \quad (38)$$

The conditional probabilities $\Pr(y_{\tau-u}, s_{\tau-u} | x^\tau, s_0^{\tau-u-1}, y^{\tau-u-1})$ and $\Pr(y_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u})$ are all independent of the source, since

$$\Pr(y_{\tau-u}, s_{\tau-u} | x^\tau, s_0^{\tau-u-1}, y^{\tau-u-1}) \stackrel{(a)}{=} \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-u}, s_{\tau-u-1}) \stackrel{(b)}{=} \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-u}^\tau, s_{\tau-u-1}^{\tau-u-1}, y^{\tau-u-1}) \quad (39)$$

and

$$\begin{aligned} \Pr(y_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u}) &= \sum_{s_{t-u+1}^t} \Pr(y_{t-u+1}^t, s_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u}) \\ &= \sum_{s_{t-u+1}^t} \prod_{\tau=t-u+1}^t \Pr(y_\tau, s_\tau | x^t, s_0^{\tau-1}, y^{\tau-1}) \\ &\stackrel{(c)}{=} \sum_{s_{t-u+1}^t} \prod_{\tau=t-u+1}^t \Pr(y_\tau, s_\tau | x_\tau, s_{\tau-1}) \\ &\stackrel{(d)}{=} \sum_{s_{t-u+1}^t} \prod_{\tau=t-u+1}^t \Pr(y_\tau, s_\tau | x_{t-v}^\tau, s_{t-v-1}^{\tau-1}, y^{\tau-1}) \\ &= \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \end{aligned} \quad (40)$$

where equalities (a), (b), (c) and (d) result from Proposition 1 and the assumption $u \leq v$. Equalities (a) and (c) also state that the conditional probabilities $\Pr(y_{\tau-u}, s_{\tau-u} | x^\tau, s_0^{\tau-u-1}, y^{\tau-u-1})$ and $\Pr(y_{t-u+1}^t | x^t, s_0^{t-u}, y^{t-u})$ are completely determined by the channel transition law.

Therefore, the given source $\mathcal{P}_1 \in \mathcal{P}(u, u)$ induces the joint probability as

$$\begin{aligned} \Pr^{(\mathcal{P}_1)}(x_{t-v}^t, s_{t-v-1}^{t-u}, y^t) &= \sum_{x_{t-v-1}^t, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr^{(\mathcal{P}_1)}(x^v, s_0^{v-u}, y^{v-u}) \prod_{\tau=v+1}^t \Pr^{(\mathcal{P}_1)}(x_\tau | x_{\tau-1}^{\tau-1}, s_0^{\tau-u-1}, y^{\tau-u-1}) \\ &\quad \times \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-v}^\tau, s_{\tau-v-1}^{\tau-u-1}, y^{\tau-u-1}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \end{aligned} \quad (41)$$

and the conditional probability as

$$\Pr^{(\mathcal{P}_1)}(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1}) = \frac{\Pr^{(\mathcal{P}_1)}(x_t^t, s_{t-v-1}^{t-u-1}, y^{t-u-1})}{\Pr^{(\mathcal{P}_1)}(x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})} \quad (42)$$

$$= \frac{\sum_{x_{t-v-1}^t, s_0^{t-v-2}} \Pr^{(\mathcal{P}_1)}(x^t, s_0^{t-u-1}, y^{t-u-1})}{\sum_{x_{t-v-1}^t, s_0^{t-v-2}} \Pr^{(\mathcal{P}_1)}(x^{t-1}, s_0^{t-u-1}, y^{t-u-1})} \quad (43)$$

where

$$\Pr^{(\mathcal{P}_1)}(x^t, s_0^{t-u-1}, y^{t-u-1}) = \Pr^{(\mathcal{P}_1)}(x^{t-1}, s_0^{t-u-1}, y^{t-u-1}) \Pr^{(\mathcal{P}_1)}(x_t | x^{t-1}, s_0^{t-u-1}, y^{t-u-1})$$

and

$$\Pr^{(\mathcal{P}_1)}(x^{t-1}, s_0^{t-u-1}, y^{t-u-1}) = \prod_{\tau=1}^{t-1} \Pr^{(\mathcal{P}_1)}(x_\tau | x_{\tau-1}^{\tau-1}, s_0^{\tau-u-1}, y^{\tau-u-1}) \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-u}, s_{\tau-u-1}, y^{\tau-u-1}).$$

On the other hand, the source $\mathcal{P}_2 \in \mathcal{P}_v(u, u)$ constructed as (37) induces the joint probability as

$$\begin{aligned}
\Pr^{(\mathcal{P}_2)}(x_{t-v}^t, s_{t-v-1}^t, y^t) &= \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr^{(\mathcal{P}_2)}(x^v, s_0^{v-u}, y^{v-u}) \prod_{\tau=v+1}^t \Pr^{(\mathcal{P}_2)}(x_\tau | x^{\tau-1}, s_0^{\tau-u-1}, y^{\tau-u-1}) \\
&\quad \times \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-v}^\tau, s_{\tau-v-1}^{\tau-u-1}, y^{\tau-u-1}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \\
&\stackrel{(e)}{=} \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr^{(\mathcal{P}_1)}(x^v, s_0^{v-u}, y^{v-u}) \prod_{\tau=v+1}^t \Pr^{(\mathcal{P}_1)}(x_\tau | x^{\tau-1}, s_{\tau-v}^{\tau-u-1}, y^{\tau-u-1}) \\
&\quad \times \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-v}^\tau, s_{\tau-v-1}^{\tau-u-1}, y^{\tau-u-1}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \\
&\stackrel{(f)}{=} \sum_{x^{t-v-1}, s_0^{t-v-2}, s_{t-v}^{t-u}} \Pr^{(\mathcal{P}_1)}(x^v, s_0^{v-u}, y^{v-u}) \prod_{\tau=v+1}^t \frac{\Pr^{(\mathcal{P}_1)}(x_{\tau-v}^\tau, s_{\tau-v-1}^{\tau-u}, y^{\tau-u})}{\Pr^{(\mathcal{P}_1)}(x_{\tau-v}^{\tau-1}, s_{\tau-v-1}^{\tau-u-1}, y^{\tau-u-1})} \\
&\quad \times \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \\
&\stackrel{(g)}{=} \sum_{s_{t-v}^{t-u}} \Pr^{(\mathcal{P}_1)}(x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \Pr(y_{t-u+1}^t | x_{t-v}^t, s_{t-v-1}^{t-u}, y^{t-u}) \\
&= \Pr^{(\mathcal{P}_1)}(x_{t-v}^t, s_{t-v-1}^t, y^t) \tag{44}
\end{aligned}$$

where equality (e) follows from the construction of the source $\mathcal{P}_2$, equality (f) results from the conditional probability in (42), and equality (g) is obtained by summing and canceling the numerators and the denominators in successive fractions starting at $\tau = v + 1$ and considering $\Pr^{(\mathcal{P}_1)}(x^v, s_0^{v-u}, y^{v-u})$.

Equalities in (44) imply that the source $\mathcal{P}_2 \in \mathcal{P}_v(u, u) \subseteq \mathcal{P}(u, u)$ induces the same information $I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1})$ as the source $\mathcal{P}_1 \in \mathcal{P}(u, u)$ does. Since $\mathcal{P}_1$ is chosen from $\mathcal{P}(u, u)$ arbitrarily, the supremum $\mathcal{I}_{FB, SI}^*(u, v)$ can be taken over the set of conditional Markov sources $\mathcal{P}_v(u, u)$ instead of over the set $\mathcal{P}(u, u)$. ■

APPENDIX C

PROOF OF THEOREM 3

Proof: For convenience, the conditional probabilities $\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y^{t-u-1})$ and $\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1})$ are both referred to as *policies* at time t . To prove Theorem 3, we shall show that the vector of the a posteriori probabilities $\underline{\alpha}_{t-1}$ can be used to replace the delayed feedback y^{t-u-1} for the purpose of determining the optimal policies to achieve the supremum $\mathcal{I}_v(X, S \rightarrow Y)$. First, we show that Bellman's principle of optimality [29, 30] holds. For any time instant T in the interval $[1, N]$, we decompose the information rate $\sum_{t=1}^N I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1})$ as

$$\sum_{t=1}^N I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1}) = \sum_{t=1}^{T-1} I(X_{t-v}^t, S_{t-v-1}^t; Y_t | Y^{t-1}) + \sum_{y^{T-u-1}} \Pr(y^{T-u-1}) \left[\sum_{t=T}^N I(X_{t-v}^t, S_{t-v-1}^t; Y_t | y^{T-u-1}, Y_{T-u}^{t-1}) \right]. \tag{45}$$

Similar to (38) in the proof of Theorem 2, we have

$$\begin{aligned}
\Pr(x^{T-1}, s^{T-v-2}, y^{T-1}) &= \sum_{s_{T-v-1}^{T-u-1}} \Pr(x^{T-1}, s^{T-u-1}, y^{T-1}) \\
&= \sum_{s_{T-v-1}^{T-u-1}} \prod_{\tau=1}^{T-1} \Pr(x_\tau | x_{\tau-v}^{\tau-1}, s_{\tau-v-1}^{\tau-u-1}, y^{\tau-u-1}) \Pr(s_{\tau-u}, y_{\tau-u} | x_{\tau-u}, s_{\tau-u-1}) \Pr(y_{T-u}^{T-1} | x_{T-u}^{T-1}, s_{T-u-1}^{T-1}) \tag{46}
\end{aligned}$$

which is independent of policies after time T , i.e., independent of the policies in the set $\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y_{t-u}^{t-u-1}) | T \leq t \leq N\}$. Therefore, if optimal policies from time 1 to T are given, then the corresponding policies after time T must be optimal in the sense that they maximize the last term of (45). Thus we have proved Bellman's principle of optimality [29, 30].

Next, we show that if after time T we utilize policies

$$\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{T-1}, y_{T-u}^{t-u-1}) | T \leq t \leq N\}$$

instead of the general policies

$$\{\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y_{T-u}^{T-u-1}, y_{T-u}^{t-u-1}) | T \leq t \leq N\}$$

we can still maximize the last term in (45). To show this, suppose that two different sequences y^{T-u-1} and $\tilde{y}^{T-u-1}$ induce the same a posteriori probability vectors $\underline{\alpha}_{T-1}$ and $\tilde{\alpha}_{T-1}$, that is, for all $(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1})$, we have

$$\alpha_{T-1}(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1}) = \tilde{\alpha}_{T-1}(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1}).$$

For the different sequences y^{T-u-1} and $\tilde{y}^{T-u-1}$, if we use the same policies after time T , i.e., for all t in the interval $T \leq t \leq N$,

$$\Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, y_{T-u}^{T-u-1}, y_{T-u}^{t-u-1}) = \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \tilde{y}_{T-u}^{T-u-1}, y_{T-u}^{t-u-1})$$

then we have

$$\begin{aligned} \Pr(x_{T-v}^N, s_{T-v-1}^{N-v-1}, y_{T-u}^N | y^{T-u-1}) &= \sum_{s_{N-v}^{N-u}} \Pr(x_{T-v}^N, s_{T-v-1}^{N-u}, y_{T-u}^N | y^{T-u-1}) \\ &= \sum_{s_{N-v}^{N-u}} \Pr(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1} | y^{T-u-1}) \Pr(x_{T-v}^N, s_{T-u}^{N-u}, y_{T-u}^{N-u} | x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1}, y^{T-u-1}) \\ &\quad \times \Pr(y_{N-u+1}^N | x_{T-v}^N, s_{T-v-1}^{N-u}, y^{N-u}) \\ &\stackrel{(a)}{=} \sum_{s_{N-v}^{N-u}} \alpha_{T-1}(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1}) \Pr(y_{N-u+1}^N | x_{N-u+1}^N, s_{N-u}) \\ &\quad \times \prod_{\tau=T}^N \Pr(x_{\tau}^{\tau-1} | x_{\tau-v}^{\tau-1}, s_{\tau-v-1}^{\tau-u-1}, y_{T-u}^{T-u-1}, y_{T-u}^{\tau-u-1}) \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-u}, s_{\tau-u-1}) \\ &= \sum_{s_{N-v}^{N-u}} \tilde{\alpha}_{T-1}(x_{T-v}^{T-1}, s_{T-v-1}^{T-u-1}) \Pr(y_{N-u+1}^N | x_{N-u+1}^N, s_{N-u}) \\ &\quad \times \prod_{\tau=T}^N \Pr(x_{\tau}^{\tau-1} | x_{\tau-v}^{\tau-1}, s_{\tau-v-1}^{\tau-u-1}, \tilde{y}_{T-u}^{T-u-1}, y_{T-u}^{\tau-u-1}) \Pr(y_{\tau-u}, s_{\tau-u} | x_{\tau-u}, s_{\tau-u-1}) \\ &\stackrel{(b)}{=} \Pr(x_{T-v}^N, s_{T-v-1}^{N-v-1}, y_{T-u}^N | \tilde{y}^{T-u-1}) \end{aligned} \tag{47}$$

where equalities (a) and (b) result from Proposition 1 and the assumption $u \leq v$. The equalities in (47) imply

$$\sum_{t=T}^N I(X_{t-v}^t, S_{t-v-1}^t; Y_t | y^{T-u-1}, Y_{T-u}^{t-1}) = \sum_{t=T}^N I(X_{t-v}^t, S_{t-v-1}^t; Y_t | \tilde{y}^{T-u-1}, Y_{T-u}^{t-1}). \tag{48}$$

Therefore, the optimal policies after time T for y^{T-u-1} must also be optimal for $\tilde{y}^{T-u-1}$, and vice versa. Since y^{T-u-1} and $\tilde{y}^{T-u-1}$ induce the same vector $\underline{\alpha}_{T-1} = \tilde{\underline{\alpha}}_{T-1}$, $\underline{\alpha}_{T-1}$ can be used instead of y^{T-u-1} , and the optimal policies after time T can be replaced by

$$\left\{ \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{T-1}, y_{T-u}^{t-u-1}) \mid T \leq t \leq N \right\}.$$

Since T is chosen arbitrarily, the optimal source in the set $\mathcal{P}'_v(u, u) = \left\{ \Pr(x_t | x_{t-v}^{t-1}, s_{t-v-1}^{t-u-1}, \underline{\alpha}_{t-1}) \right\}$ achieves the same supremum $\mathcal{I}_{FB, SI}^*(u, v)$ as the optimal source in the set $\mathcal{P}_v(u, u)$ does. ■

ACKNOWLEDGMENT

The authors would like to thank Shaohua Yang and reviewers for helpful suggestions.

REFERENCES

- [1] C. E. Shannon, "A mathematical theory of communication," *Bell Syst. Tech. J.*, vol. 27, pp. 379–423, 623–656, Jul./Oct. 1948.
- [2] —, "The zero error capacity of a noisy channel," *IRE Trans. Inform. Theory*, vol. IT-2, no. 3, pp. 8–19, Sep. 1956.
- [3] W. Hirt, "Capacity and information rates of discrete-time channels with memory," Ph.D. dissertation, Swiss Federal Institute of Technology (ETH), Zurich, Switzerland, 1988.
- [4] M. Mushkin and I. Bar-David, "Capacity and coding for the Gilbert-Elliott channels," *IEEE Trans. Inform. Theory*, vol. IT-35, no. 6, pp. 1277–1290, Nov. 1989.
- [5] D. Arnold and H.-A. Loeliger, "On the information rate of binary-input channels with memory," in *Proc. 2001 IEEE Int. Conf. Communication*, vol. 9, Helsinki, Finland, Jun. 2001, pp. 2692–2695.
- [6] H. D. Pfister, J. B. Soriaga, and P. H. Siegel, "On the achievable information rates of finite state ISI channels," in *Proc. IEEE GLOBECOM'01*, vol. 5, San Antonio, Texas, Nov. 25–29 2001, pp. 2992–2996.
- [7] V. Sharma and S. K. Singh, "Entropy and channel capacity in the regenerative setup with applications to Markov channels," in *Proc. IEEE Intern. Symp. on Inform. Theory*, Washington, D.C., Jun. 24–29 2001, p. 283.
- [8] D. M. Aronld, H.-A. Loeliger, P. O. Vontobel, A. Kavčić, and W. Zeng, "Simulation-based computation of information rates for channels with memory," *IEEE Trans. Inform. Theory*, vol. 52, no. 8, pp. 3498–3508, Aug. 2006.
- [9] A. Kavčić, "On the capacity of Markov sources over noisy channels," in *Proc. IEEE GLOBECOM'01*, vol. 5, San Antonio, TX, USA, Nov. 25–29 2001, pp. 2997–3001.
- [10] P. O. Vontobel, A. Kavčić, D. M. Arnold, and H.-A. Loeliger, "A generalization of the Blahut-Arimoto algorithm to finite-state channels," *IEEE Trans. Inform. Theory*, vol. 54, no. 5, pp. 1887–1918, May 2008.
- [11] J. Chen and P. H. Siegel, "Markov processes asymptotically achieve the capacity of finite-state intersymbol interference channels," in *Proc. IEEE Intern. Symp. on Inform. Theory*, Chicago, IL, USA, Jun. 27–Jul. 2 2004, p. 346.
- [12] —, "Markov processes asymptotically achieve the capacity of finite-state intersymbol interference channels," *IEEE Trans. Inform. Theory*, vol. 54, no. 3, pp. 1295–1303, Mar. 2008.
- [13] P. O. Vontobel and D. Arnold, "An upper bound on the capacity of channels with memory and constraint input," in *Proc. 2001 IEEE ITW*, Cairns, Australia, Sept. 2–7 2001, pp. 147–149.
- [14] S. Yang, A. Kavčić, and S. Tatikonda, "Feedback capacity of finite-state machine channels," *IEEE Trans. Inform. Theory*, vol. 51, no. 3, pp. 799–810, Mar. 2005.
- [15] J. L. Massey, "Causality, feedback and directed information," in *Proc. 1990 Intl. Symp. Inform. Theory and its Applications*, Waikiki, Hawaii, USA, Nov. 27–30 1990, pp. 303–305.
- [16] S. Tatikonda, "Control under communication constraints," Ph.D thesis, Massachusetts Inst. of Technology, Cambridge, MA, Sept. 2000.
- [17] J. Chen and T. Berger, "The capacity of finite-state Markov channels with feedback," *IEEE Trans. Inform. Theory*, vol. 51, no. 3, pp. 780–798, Mar. 2005.

- [18] S. Tatikonda, "A Markov decision approach to feedback channel capacity," in *Proceedings of the 44th IEEE Conference on Decision and Control, and the European Control Conference 2005*, Seville, Spain, Dec. 12-15 2005, pp. 3213–3218.
- [19] S. Yang, A. Kavčić, and S. Tatikonda, "On the feedback capacity of power-constrained Gaussian noise channels with memory," *IEEE Trans. Inform. Theory*, vol. 53, no. 3, pp. 929–954, Mar. 2007.
- [20] H. Permuter, P. Cuff, B. V. Roy, and T. Weissman, "Capacity of the trapdoor channel with feedback," *IEEE Trans. Inform. Theory*, vol. 54, no. 7, pp. 3150–3165, Jul. 2008.
- [21] S. Tatikonda and S. Mitter, "The capacity of channels with feedback," *IEEE Trans. Inform. Theory*, vol. 55, no. 1, pp. 323–349, Jan. 2009.
- [22] L. Zhao and H. H. Permuter, "Zero-error feedback capacity of channels with state information via dynamic programming," *IEEE Trans. Inform. Theory*, vol. 56, no. 6, pp. 2640–2650, Jun. 2010.
- [23] Y.-H. Kim, "A coding theorem for a class of stationary channels with feedback," *IEEE Trans. Inform. Theory*, vol. 54, no. 4, pp. 1488–1499, Apr. 2008.
- [24] H. H. Permuter, T. Weissman, and A. J. Goldsmith, "Finite state channels with time-invariant deterministic feedback," *IEEE Trans. Inform. Theory*, vol. 55, no. 2, pp. 644–662, Feb. 2009.
- [25] H. Viswanathan, "Capacity of Markov channels with receiver CSI and delayed feedback," *IEEE Trans. Inform. Theory*, vol. 45, no. 2, pp. 761–771, Mar. 1999.
- [26] A. J. Goldsmith and P. P. Varaiya, "Capacity, mutual information, and coding for finite-state Markov channels," *IEEE Trans. Inform. Theory*, vol. 42, no. 3, pp. 868–886, May 1996.
- [27] R. G. Gallager, *Information Theory and Reliable Communication*. New York: John Wiley and Sons, Inc, 1968.
- [28] R. Venkataramanan and S. S. Pradhan, "Directed information for communication problems with common side information and delayed feedback/feedforward," in *Proceedings of the 43rd Annual Allerton Conference*, Monticello, IL, Sep. 2005, pp. 794–803.
- [29] D. P. Bertsekas, *Dynamic Programming and Optimal Control*, 3rd ed. Belmont, MA: Athena Scientific, 2005, vol. 1.
- [30] —, *Dynamic Programming and Optimal Control*, 3rd ed. Belmont, MA: Athena Scientific, 2007, vol. 2.
- [31] X. Huang, A. Kavčić, X. Ma, and D. Mandic, "Upper bounds on the capacities of non-controllable finite-state machine channels using dynamic programming methods," in *Proc. IEEE Intern. Symp. on Inform. Theory*, Seoul, Korea, Jun. 28 - Jul. 3 2009, pp. 2346–2350.
- [32] L. R. Bahl, J. Cocke, F. Jelinek, and J. Raviv, "Optimal decoding of linear codes for minimizing symbol error rate," *IEEE Trans. Inform. Theory*, vol. IT-20, no. 2, pp. 284–287, Mar. 1974.
- [33] R. Bhattacharya and M. Majumdar, *Random Dynamical Systems*, 1st ed. New York: Cambridge University Press, 2007.